



THE LEADING
GLOBAL SUPPLIER
OF THREAD
ROLLING DIES

ABOUT US

Leading global supplier of Thread Rolling Dies offering a comprehensive range of products and services to the Automotive and Industrial Fastener Manufacturers Worldwide. Committed to maintain our leadership by providing unmatched product quality, technological innovation and superior customer service, resulting in the lowest cost per piece for our customers.

Our manufacturing facility combines the latest CNC machining technology with the traditional craftsmanship of a skilled and dedicated workforce. Investment in new equipment and skill-up is part of our ongoing philosophy to exceed customer expectations.



- Established in 1988.
- Integrated in-house manufacturing facility.
- Manufacturers of Flat Milled and Flat Ground Dies.
- Special Surface treatment for enhanced tool life.
- Production Size Range - #000 (45/39/12 mm) to 1000D (550/495/56 mm) upto 168 mm Face Width.

INTEGRATED IN HOUSE MANUFACTURING



Kadimi commitment to customer service includes a fully comprehensive technical support programme. Our in-depth knowledge of threading tools, how they are made and the machines they are used on, is a highly valued resource and freely accessible to customers world-wide.



QUALITY & CUSTOMER SERVICE

Kadimi utilizes sophisticated technology in a fully integrated manufacturing operation having CNC machine tools, in-house heat-treatment and have developed highly specialised operations for the production of Thread rolling dies.

Kadimi dies are inspected and validated through our stringent quality systems from receipt of customer order to delivery of product, supported by prompt after sale service.

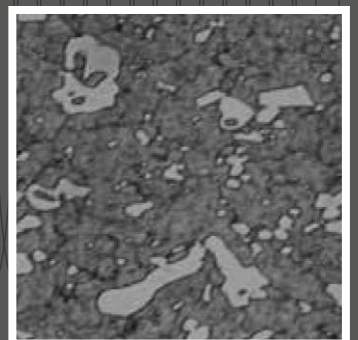

STANDARD & LICENSED THREAD ROLL DIES




STRUX®



P-Point
Mathread

MATPoint

VS Point
MAT Point



MATPOINT
VR



Ejot PT®




Ejot Delta PT®




Ejot Duro PT®



Ejot PT® Type DG




EXTRUDE-TITE®




POWERLOK®



PLASTITE®



OIL-TAPTITE®




TAPTITE® PRO™



TAPTITE II®



TAPTITE® CA
CUT OFF



TAPTITE® CA
NON CUT OFF




FASTITE® 2000™




TAPTITE 2000®

Disclaimer: All products Trade name, trademark, logo used for illustration purposes only. They belong to respective licensors only.


KNURL APPLICATIONS



Diagonal Knurling

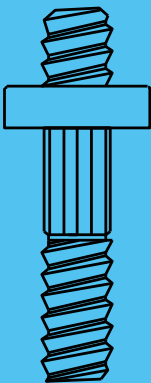

Straight Knurling

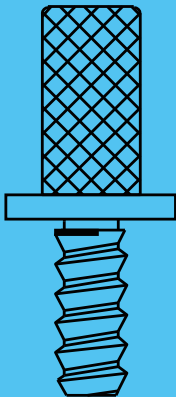

Diamond Knurling



Type A



Type AB



Type B



Type F

STANDARD FASTENERS



Type U



VA




Hi Lo Screw




Type BF

SPECIAL PRODUCTS

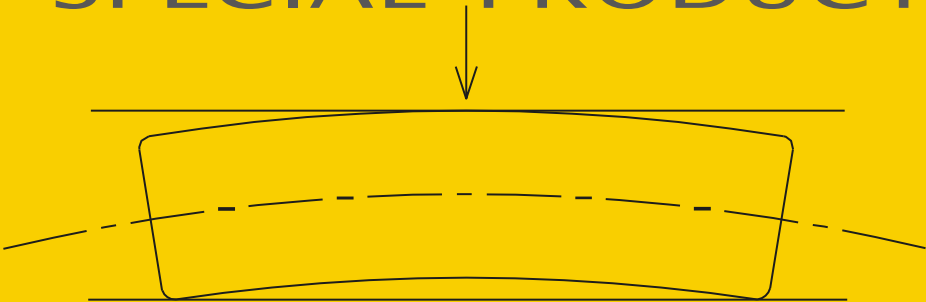

Straightening die







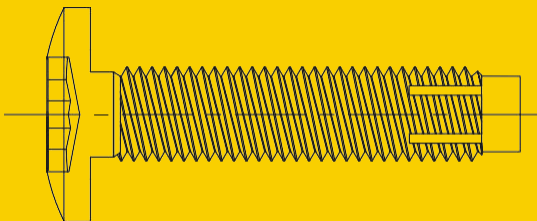


Paint Scraper Dies



AHT Plus for Rolling after Heat Treatment

TYPICAL THREAD AND FORM ROLLING APPLICATIONS USING KADIMI DIES

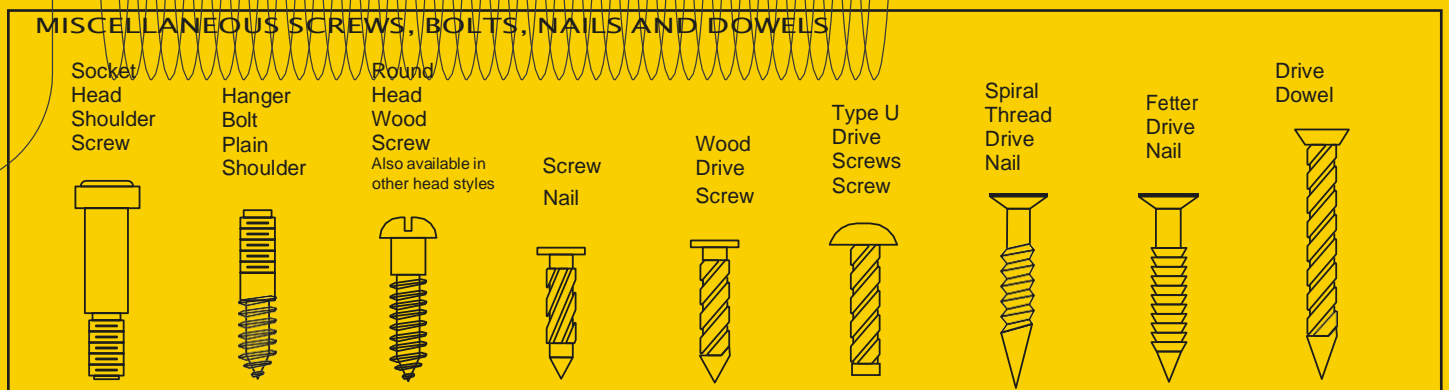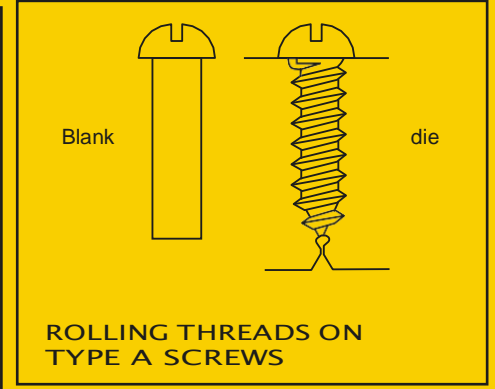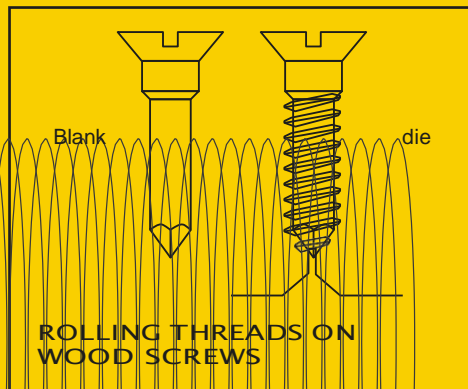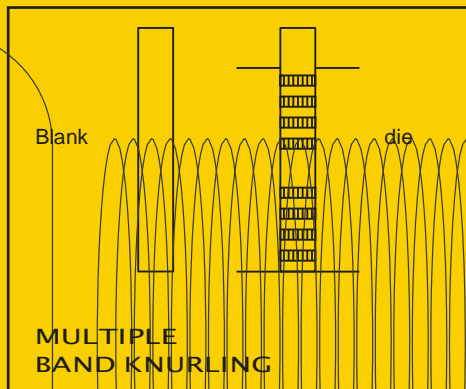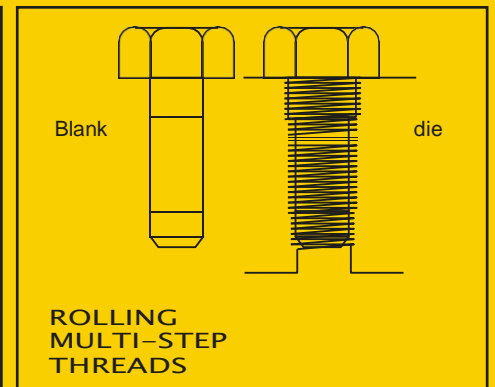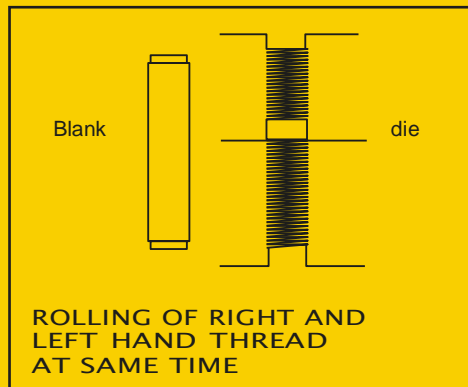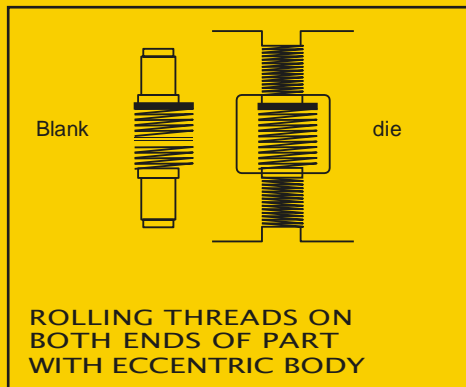

STUDS



Tap
End



Double
End

TAPPING SCREWS

Available in other head styles as well as those shown



Type A or AB



Type B






Type C





Type F Rolled Flutes

Note: Types D and G are same as Type C with the addition of cut flutes on the points.

THREADING AND GROOVING

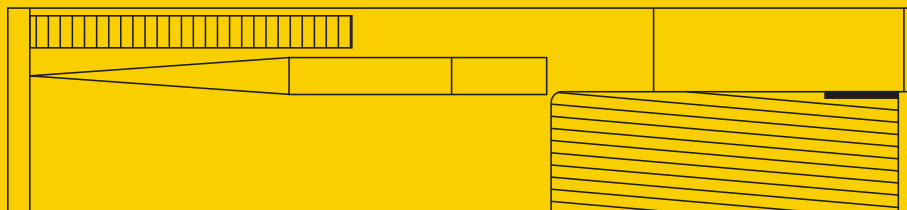

COMBINATION TRANSFER DIES

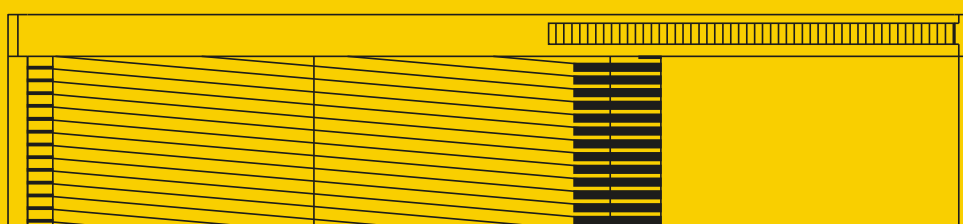


ADVANTAGES OF KADIMI THREAD ROLLING DIES

Longer Tool Life & Reduced Threading Costs per piece.

Kadimi Thread Rolling Dies give longer tool life which results in lower cost per piece for the customers.

Installation is made easy because of the accuracy of Kadimi dies which are made to closely controlled limits of tolerances to ensure making perfect contact with the screw blank to be rolled.

Reduced setup time, minimised shimming, elimination of drunkenness and extended die life.

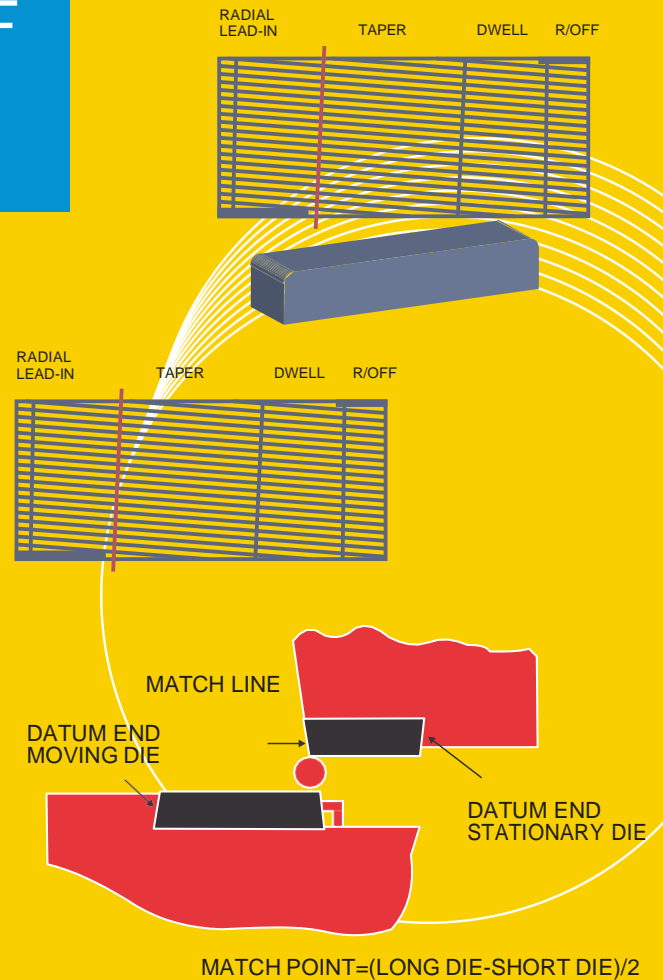


Flat thread rolling dies with sharp corners on the run out threads generates stress concentration areas which result in fatigue cracks in the rolled screw. With the Radius Run-Out (RRO) offered by Kadimi, the smooth radius in the root of the thread continues right up to the point where the thread blends in the shank of the screw. This RRO was designed for rolling high strength aerospace bolts, however, it is available for all Kadimi dies.

LF TECHNOLOGY

Our LF dies are developed to roll the best quality fasteners without modifying any of the processes (e.g. blank preparation and machine operation) in controlling manufacturing variables to yield lap-free threads.

- Helps maintain production rates and m/c speeds - Rolling critical/hard material fasteners.
- Enhances control of Grain flow; No other thread rolling dies in the world has this capability.
- Improves physical characteristics of the fastener, the smoother surface finish and rolled fasteners stronger in fatigue, shear and tensile strength.

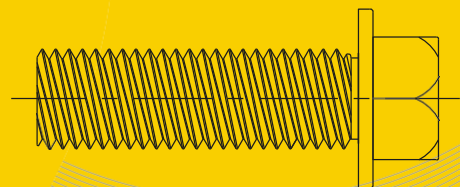

KADIMI THREAD ROLLING DIE FEATURES


- Special LF Dies for Laps free rolling.
- Kadimi Classic profile Dies for rolling "AHT", SS & exotic materials .
- Controlled Radius Run - Out (RRO).
- Highest tolerance specifications for repeatability and ease of set-up.
- Leaders in Special and Licensed Die technology.
- Optimized roll - forming designs using finite element analysis.
- Widest range of materials and surface treatments to suit your application.
- Die with Lift Holes for ease of handling.

Product for better, smoother Thread: The well blended Radii in Kadimi dies allow the metal of the part being formed to flow more easily and produce a better, smoother thread.





Increased Fatigue Resistance due to RRO offered by Kadimi . With this well blended radius, a better and smoother thread is produced.

Consistent Accuracy on threaded parts is guaranteed with Kadimi Thread Rolling Dies which are held to extremely close tolerances.

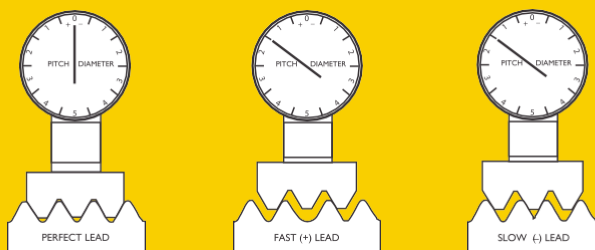

Lead deviation, fast or slow, increases pitch diameter.




NOTE: WE ALSO OFFER RE-GRIND SERVICE

SANDBLASTING AND CROSSNICKING EXAMPLES


Type A.

Duplex - 2 Way Rolling

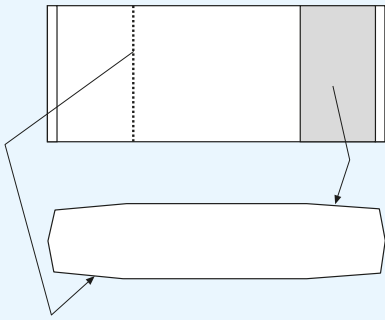


Type B.

Duplex - 4 Way Rolling

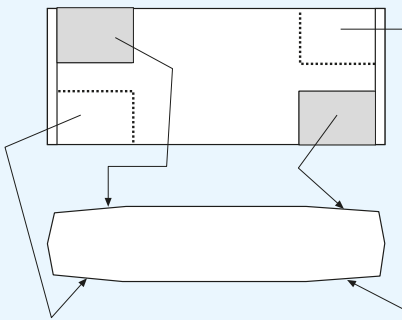


Type C.

**Single Face -
Double Setting - Single Rolling**



Type D.


**Single Face
Double Setting - 2 Way Rolling**



Crossnick


STANDARD RRO TYPES

RRO type B

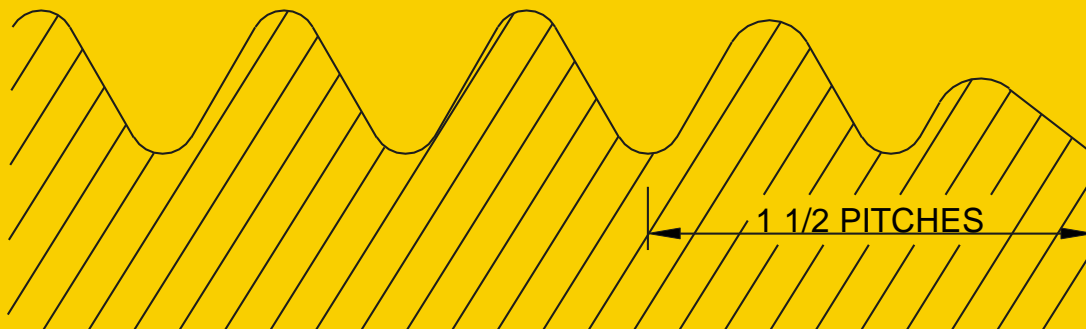


1 1/2 Pitch R.R.O. 45° x Single Depth Chamfer

RRO type C

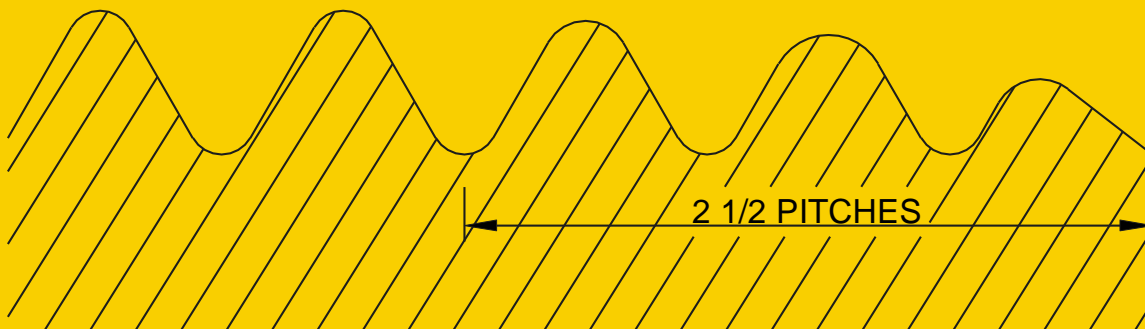

2 1/2 Pitch R.R.O. 30° x Single Depth Chamfer

RRO: RADIUS RUN OUT

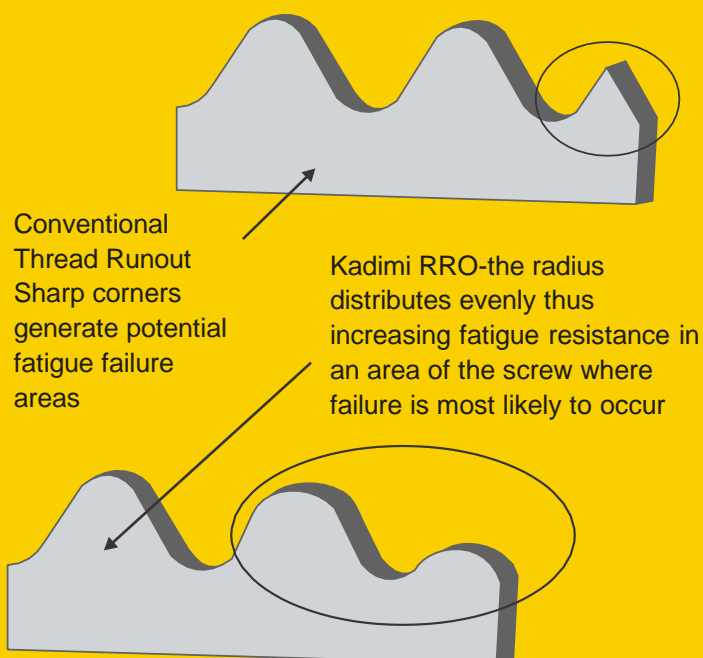

KADIMI RRO TYPE EXPLAINED


RRO TYPE	RRO X ANGLE X DEPTH
A	1 PITCH X 62° X 3 TD (2P UNDER HEAD)
B	1.5 PITCH X 45° X 1 TD
C	2.5 PITCH X 30° X 1 TD
D	2.5 PITCH X 45° X 2 P (4.5P UNDER HEAD)
E	1.5 PITCH X 45° X 2 TD (2.5P UNDER HEAD)
G	CHAMFER AND BREAK SHARP EDGE ONLY
H	2.5 PITCH X 45° X 2 TD (3.5P UNDER HEAD)
I	1 PITCH X 60° X 1 TD
J	2.5 PITCH X 30° X 2.5 TD (3.5P UNDER HEAD)
K	1 PITCH X 60° X 2 TD (1.5P UNDER HEAD)
L	1.5 PITCH X 47° X 2 TD (2.5P UNDER HEAD)
M	1.5 PITCH X 47° X 2 TD (2.5P UNDER HEAD)

P = PITCH TD = THREAD DEPTH

ANGLE DATUM IS TAKEN FROM THREADED FACE

We can customize the RRO according to customer needs.

ESTABLISHED & CERTIFIED
QUALITY SYSTEMS

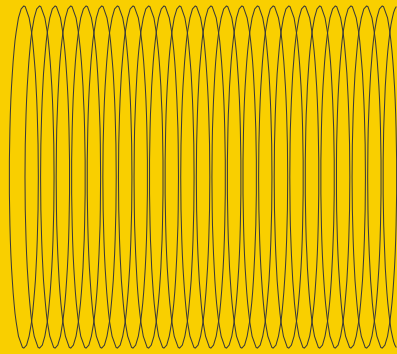

KADIMI TOOL MFG. CO. PVT. LTD.

118, UDYOG VIHAR, PHASE-1, DUNDAHERA,
GURUGRAM - 122016,(NEAR DELHI)
HARYANA, INDIA
MOB: +91-98105 15507
e-mail: snath@kadimi.net
www.kadimitool.com

CIN: U00359HR1987PTC035680

